

Thank you for purchasing **NOSPARO**, the security system that strenghtens the obligations prescribed by the Italian Law 110/75 art. 20 and 20 bis with regard to the safety of weapons and people.

The main purpose of **NOSPARO** is to prevent people from loading the weapon without the consent of the owner.

The **NOSPARO** lock has been designed for all shotguns, gauge 12/16/20/28 with smooth barrel for manual loading. It is not designed for any other gauge or any other types of weapon and so far it is the only safety system tested and controlled by the **Banco Nazionale di Prova** ubicated in Gardone Val Trompia, Italy.

NOSPARO

SECURITY LOCKS FOR SHOTGUNS


C12M | C16M | C20M | C28M

INSERTION



Ensure that the cartridge chamber is empty, clean and free of lubricating oils. This operation must be carried out in accordance with the weapons owner's manual.

Check that the **NOSPARO** lock has the plier completely "closed". If necessary, grasp it with one hand and turn the key with the other one in an **anti-clockwise** direction until you reach the end of the screw.

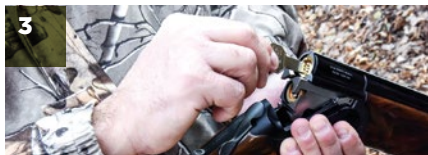

Push the **NOSPARO** lock inside the barrel up to a stop and 5/6 mm underneath the ejectors plane (in case of burst chambers with L >70 mm the lock does not reach a stop).



Close the shotgun, shoot a blank shot to avoid keeping the firing pins armed.



Insert the **NOSPARO** lock into the cartridge chamber of the shotgun, on the breech side as if it was a normal cartridge.



Turn the key **clockwise** until the maximum possible twist is reached (during the tests at the Banco Nazionale di Prova the lock has been tightened to 3Nm). Turn the key **anti-clockwise** until you hear the "click" sound or alternatively until you reach the alignment mark (0 degrees).

Pull out the key, repeat the operation in case of double or overlapped shotgun.

WATCH OUT


- Under no circumstances should you attempt to remove the **NOSPARO** lock without its key, as any attempted break-in could damage both the weapon and the lock itself.
- The key is the only suitable tool to extract the **NOSPARO** lock.

**NOSPARO SAFETY LOCK FOR 12/16/20/28 GAUGE SHOTGUN
TESTED BY BANCO NAZIONALE DI PROVA**

EXTRACTION



To remove the **NOSPARO** lock, open the shotgun and insert the key.

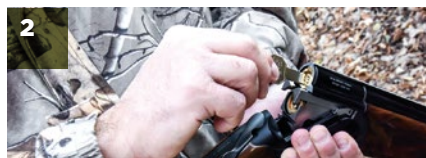

Turn the key **anti-clockwise** until the screw ends.



Rotate the key by some degree so that it misaligns from the “click” position.



Pull the key and pull out the **NOSPARO** lock taking care not to tear the O-ring because of the edges of the ejectors.

IMPORTANT



- Note the number printed on the key (see example in the picture) in the appropriate space of the package and keep it in a safe place: in case of loss of the key contact your distributor and tell him this number together with the proof of purchase.

- It is recommended at least once a year to remove the NOSPARO lock and clean the sheath with a damp cloth to keep it in a proper state of maintenance.

NOTE

- 1** The **NOSPARO** lock, even when inserted, allows the blank shot as its dimensions do not interfere with the firing pins.
- 2** To maximize the life of the sheath keep it clean and oil-free, when not in use. Inspect it at each use making sure there are no cracks or cuts.
- 3** Avoid removing the **NOSPARO** lock if the plier is not fully closed as the sheath may be damaged.
- 4** The operating temperature within which the sheath retains its characteristics is -45 C+ 125 C.
- 5** When **NOSPARO** is sold in pairs, the supplied set of keys allows the opening of both locks.

NOSPARO is a trademark of **PREFER** srl
Via F.lli Cervi, 63 - 20023 Cantalupo di Cerro Maggiore (MI) ITALY
SERRATURE MADE IN ITALY



CERT. N. IT330082 - ISO 9001:2015

AGS agscomunica.it

NOSPARO

SECURITY LOCKS FOR SHOTGUNS

nosparo.it

NOSPARO strengthens the obligations prescribed by the Italian Law 110/75 art. 20 and 20 bis with regard to the safety of weapons and people.